arXiv:1206.1954v1 [quant-ph] 9 Jun 2012

Lossy Quantum Optical Metrology with Squeezed States

Xiao-Xiao Zhang[1], Yu-Xiang Yang[1], and Xiang-Bin Wang[1,2*]
[1] *Department of Physics and State Key Laboratory of Low-Dimensional Quantum Physics,*
Tsinghua University, Beijing 100084, People's Republic of China and
[2] *Shandong Academy of Information and Communication Technology, Jinan 250101, People's Republic of China*

(Dated: March 7, 2013)

We study the precise phase estimation using squeezed states with photon losses present. Our exact quantum Fisher information calculation shows significant quantum enhancement and thus reveals the benchmark for practical quantum metrology in this noisy scenario. However, we find that the existing parity measurement scheme [P.M. Anisimov et al, Phys. Rev. Lett. 104, 103602 (2010)] behaves worse than even classical cases given very small losses, unless we take an appropriate loss dependent phase shift. Using our formulae, the two optimized aspects including the pre-detection phase shift and the consequent light intensity of a tradeoff strategy for photon resource arrangement can be both calculated. Therefore our result makes it possible to experimentally realize quantum metrology of phase estimation with squeezed states.

INTRODUCTION

Many important tasks in scientific research involve physical processes that contribute to phase measurement. Precice measurement is of nontrivial significance since physical laws (e.g. the uncertainty principle) impose limits on it. By finding measurements that optimally resolve neighboring quantum states, Braunstein and Caves[1] proposed a metric on density operator space and a more general uncertainty principle, which lead to a bound $\delta\phi \geq 1/\sqrt{\nu F_Q}$ of the minimal error while estimating a parameter ϕ, where F_Q is the quantum Fisher information(QFI) of the probe state used in an experiment and ν is the number of identical experiments carried. Based on [1], by employing quantum entanglement[2], quantum metrology promises the possibility of attaining a more fundamental Heisenberg limit(HL) $1/n$ (n is the number of particles involved) rather than the standard quantum limit(SQL) $1/\sqrt{n}$ for precison of conventional phase estimation. Thus the knowledge of QFI has become the key, and by comparing QFIs of different states we can specify the probe state to beat the SQL. Measurement strategy is another challenge for researchers, since within the framework we can see that quantum metrology requires suitable choice of measurement basis. Many schemes up to now originate from the mathematically derived POVM measurement for pure state[1] whose physical realization remains unclear.

While the framework is appealing, imperfections in practical realizations result in certain amount of deterioration of the quantum enhancement[3–6]. Besides, an analytical form of the exact QFI is formidable to obtain due to the difficulty in diagonalizing the complicated density matrices after noisy evolution. Representatively, specific[3] or general[5] upper bounds and numerical analysis[3] of QFI with noises have been put forward. What's more, the real-world noise makes the measurement task more complicated and intractable as well. For instance, we find in this paper that a good scheme for phase measurement of squeezed vacuum state[7] will behave quite worse than even classical cases once photon losses appears.

Aiming for a deeper understanding of this malfunction of measurement scheme, we study noisy phase estimation with mathematical rigor for quite general squeezed Gaussian states in this paper. We firstly analyze the entangled two-mode case with exact QFI for lossy channels calculated via the fidelity approach, and the reason for the singling out of two mode squeezed vacuum(TMSV) state is also given. Therefore, much more precise mastery of squeezing for practical quantum optical metrology is achieved, which still show significant quantum enhancement. In order to exploit this enhancement, we secondly carefully analyze the behavior of parity measurement, which was originally proposed for trapped ions[8] and also appeared in [7][9], applied on our aforementioned preferable TMSV state with photon losses taken into account. While giving explicitly the exact phase measurement error to show the malfunction, we address on our newly discovered optimal phase measurement point depending on noise, ie. knowledge of channel losses helps to determine where to measure. This leads to vital modification of ordinary measurement procedures for ideal cases, and implies some general properties for noisy cases. For instance, unlike the ideal scenario, a balance between the average photon number n used in a single experiment and the repeated time ν of identical experiments should be built if total photon resource provided. The contemporarily realizable measurement scheme we devised to adapt for these new features arisen in noisy metrology turns out to have comparable improvement than classical setups. Thus, our exact QFI evaluation and measurement scheme as a whole undoubtedly justify the quantum enhancement in practical optical metrology, which could be heuristic and instructive for theorists and especially for experimentalists.

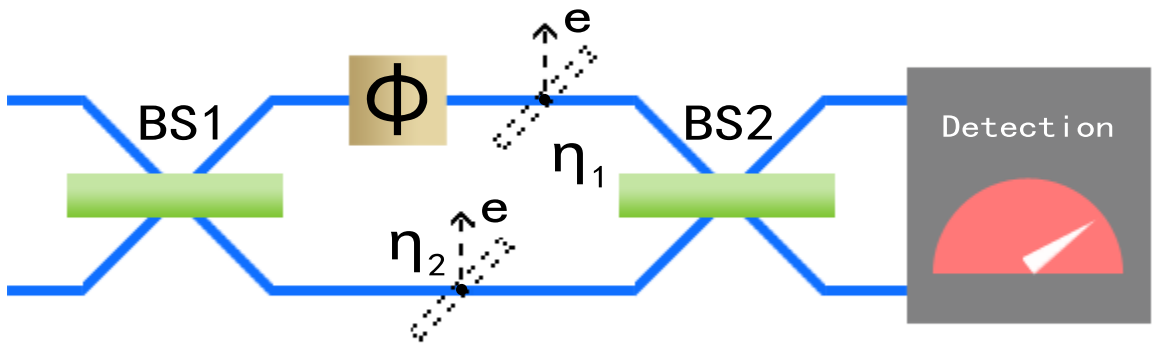

FIG. 1. Setup for quantum metrology with MZI

EXACT QFI WITH PHOTON LOSSES

The schematic display of the two-arm interferometric quantum metrology is shown in Fig.1 The essential method of phase estimation in quantum optical interferometry consists of light's passing through a Mach-Zehnder interferometer(MZI) and measurement at the output ports. A typical MZI consists of two 50:50 beam splitters and a phase shifter in one arm. The description of noise involves introducing ancillary modes of the environment. Fictitious beam splitters with transmissivity η_1, η_2 are used to produce photon losses. The losses accompany with phase accumulation simultaneously. But this can be equivalently simulated by commutative seperate phase shifting and photon losing, which can be easily seen from the fictitious beam splitter's Kraus operator form for the dispersive arm's mode. For a Gaussian state[10], the initial covariance matrix is $\gamma_0 \oplus I_E$ with possible displacement. The state after photon losses and phase accumulation is characterized by $\gamma' = M_\phi M_{loss}(\gamma_0 \oplus I_E) M_{loss}^T M_\phi^T = \begin{pmatrix} \gamma & \gamma_S \\ \gamma_S^T & \gamma_E \end{pmatrix}$, where $M_{loss/\phi}$ represent the linear transformation of field operators due to the devices. Leaving out the environment, the covariance matrix for the system we considered is $\gamma = \gamma(\phi)$. Firstly, contrary to displacement operation's uselessness for quantum metrology due to its pure translation of variance ellipse in quadrature space, squeezing notably changes the variance within the limit of uncertainty principle of the two conjugate quadratures, which strongly implies its advantage in quantum metrology. In addition, simple physical intuition implies that finite temperature degrades the quantum coherence of a state. Lastly, compared with one-mode counterparts, two-mode Gaussian states have more complex and intriguing properties, and most importantly, they are compulsory in MZI parity measurement(see MZI part). Thus, we concentrate on TMSV states for lossy interferometers rather than displaced two-mode squeezed thermal (DTMST) states. We point out that the mathematical derivation of the general DTMST states notably resembles the following TMSV case. Besides the change of the aforesaid γ_0 matrix, the two cases' covariance matrices after losses share the similar form like (1), and this is central for our discussion.

Calculation shows that for an initial TMSV state

$$\gamma(\phi) = \begin{pmatrix} d_1 & 0 & a\cos\phi & -a\sin\phi \\ 0 & d_1 & -a\sin\phi & -a\cos\phi \\ a\cos\phi & -a\sin\phi & d_2 & 0 \\ -a\sin\phi & -a\cos\phi & 0 & d_2 \end{pmatrix}, \quad (1)$$

where $d_1 = 1 + 2\eta_1 \sinh^2 r$, $d_2 = 1 + 2\eta_2 \sinh^2 r$, $a = \sqrt{\eta_1\eta_2}\sinh 2r$ and r is the squeeze parameter. Our general QFI calculation method relies on the relationship between the Bures distance and QFI[1]: $F_Q = 4[\mathrm{d}s_{Bures}(\hat{\rho} + \mathrm{d}\hat{\rho}, \hat{\rho})]^2/\mathrm{d}\phi^2$, where $\mathrm{d}s_{Bures}(\hat{\rho_1}, \hat{\rho_2}) = \sqrt{2[1 - F(\hat{\rho_1}, \hat{\rho_2})]}$ is defined using fidelity $F(\hat{\rho_1}, \hat{\rho_2}) \equiv \mathrm{Tr}\sqrt{\sqrt{\hat{\rho_1}}\hat{\rho_2}\sqrt{\hat{\rho_1}}}$. Different expressions for fidelity have been proposed[11][12]. We utilize diagonalizable quadratic Hamiltonian transformation method[12] for our use. We conclude from (1) that the final state after evolution is a two-mode squeezed thermal state, whose density operator surely has a diagonalizable quadratic Hamiltonian form. Thus, by feeding it to [12]'s method, we get the exact lossy QFI:

$$F_Q = \frac{2n(n+2)\eta_1\eta_2}{2 + n(\eta_1 + \eta_2 - 2\eta_1\eta_2)} \quad (2)$$

where $n = 2\sinh^2 r$ is the average photon number of the initial ideal TMSV state. Reduction to ideal case $F_Q = n(n+2)$ (we call it "modified HL") is straightforward. The power of our calculation method manifests itself for this generality of dealing with different lossy scenarios. For equal losses in both arms ($\eta_1 = \eta_2 = \eta$) and one-arm losses ($\eta_1 = \eta, \eta_2 = 1$), the QFIs are $\frac{n(n+2)\eta^2}{1+n(1-\eta)\eta}$ and $\frac{2\eta n(n+2)}{n(1-\eta)+2}$. The latter is more practical since losses are mostly generated by the phase accumulation.

Here we can see our exact lossy QFI (2) (corresponds to "quantum limit" $1/\sqrt{F_Q}$ in FIG.2) for both particular cases ascertain the general framework in [5], where their upper bound of QFI for optical interferometry gives scaling $1/\sqrt{n}$ for $n \gg \eta/(1-\eta)$ and $1/n$ for $n \ll \eta/(1-\eta)$. Despite of the same physical model, our intuitive upper bound of QFI[13] generally acts worse than our exact QFIs as depicted. This strongly endorses the importance of our exact QFI study. As for the performance of TMSV state, the QFIs for two lossy scenarios approach and are a little worse than their classical limits in very large loss limit(i.e. $\eta \to 0$). Notably, TMSV state beats SQL even in the presence of large losses ($\eta = 0.6$ for two-arm losses, $\eta = 0.4$ for one-arm losses). This implies that cleverly designed measurement scheme is possible to achieve enhancement with squeezing in a large extent of practical setups.

MEASUREMENT SCHEME

We denote the evolution and the expectation value of parity measurement at the output mode respectively

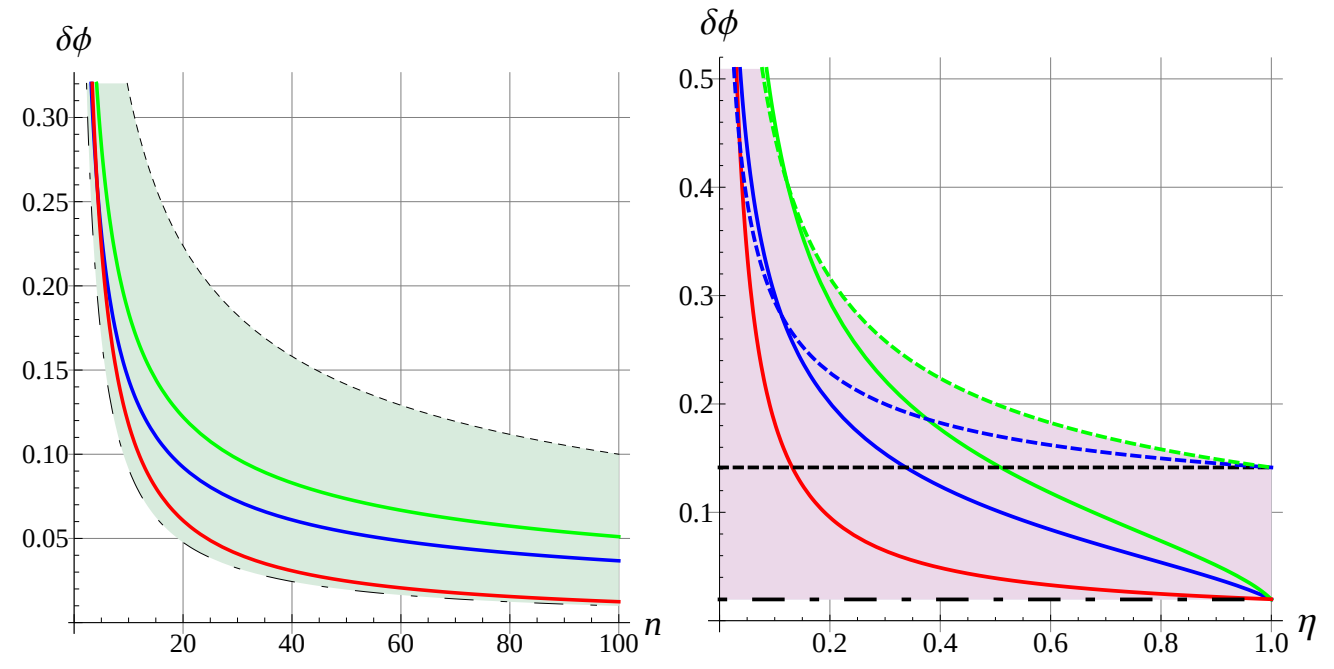

FIG. 2. (LEFT)Estimation precision $\delta\phi$ vs average photon number n. Black dashed-dotted line: Modified HL. Black dashed line: SQL. Green and blue line: Quantum limits for two-arm equal-loss($\eta_1 = \eta_2 = 0.8$) and one-arm-loss($\eta_1 = 0.8, \eta_2 = 0$) models respectively. Red line: [13].
(RIGHT)Estimation precision $\delta\phi$ vs transmissivity η. Black dashed-dotted line: Modified HL. Black dashed line: SQL. Green and blue solid line: Quantum limits for two-arm equal-loss and one-arm-loss models respectively. Green and blue dashed line: Classical limits[3] $1/\sqrt{n\eta}$ for two-arm equal-loss and $\frac{1+\sqrt{\eta}}{2\sqrt{n\eta}}$ for one-arm-loss models respectively. Red line: [13].

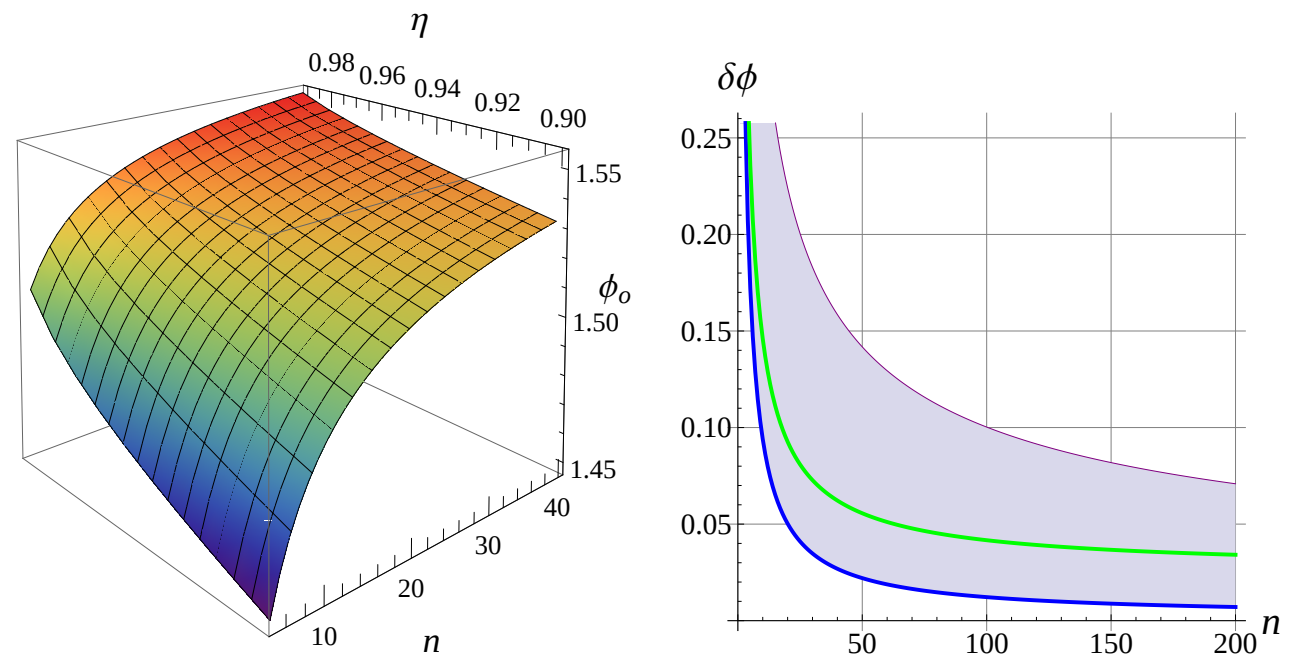

FIG. 3. (LEFT)Optimal measurement point ϕ_o vs average photon number n and transmissivity η.
(RIGHT)Phase estimation error $\delta\phi$ vs average photon number n for one-arm losses ($\eta = 99\%$). Purple line: Classical limit[3]. Blue line: Quantum limit of exact QFI. Green line: Optimal phase measurement error via parity detection.

as $|\Psi_f\rangle = \hat{U}_{lossyMZI}\,|\psi_{TMSV}\rangle_{ab} \otimes |0,0\rangle_e$ and $\langle\hat{\Pi}\rangle_\phi = \langle\Psi_f|\hat{\Pi}|\Psi_f\rangle$, where $\hat{U}_{lossyMZI} = \hat{U}_{BS}\hat{U}_\phi\hat{U}_{loss}\hat{U}_{BS}$. Using exponential operator reordering method[14] henceforward, we can calculate both the $\hat{U}_{lossyMZI}$ operator and expectation values of observables. Note that they are not trivial to obtain. For instance, it's easy to show that two one mode squeezed vacuum product state with same average photon number in each mode passing lossy MZI carries no phase information within parity measurement.

Parity operator $\hat{\Pi} = \exp\left(-\mathrm{i}\pi\hat{a}^\dagger\hat{a}\right)$ represents the observable to be measured. Research shows that parity measurements enables sub-SQL interferometric phase estimation in a wide range of quantum photonic states[9] with no need to know the complete photon counting statistics. Notably, it's useful for both qubit-like very nonclassical states (e.g. N00N state) and continuous variable quantum states (e.g. our indefinite photon number TMSV state). Besides, its unambiguous physical meaning and realization stand out among other mathematical measurement basis. It's in this spirit we devote to exploit the quantum enhancement via parity measurement.

Some concern about parity measurement is due to the absence of highly reliable photon number resolving detector, which seems to be necessary for $\hat{\Pi}$'s dependence on photon number operator. However, parity measurement actually could be done without photon number resolving detectors. We highlight the equivalence between the value of Wigner function at the origin and the parity of one mode field[15]: $\langle\hat{\Pi}\rangle = \frac{\pi}{2}W(0,0)$. Quantum tomography techniques provides practical construction method of the Wigner function of a radiation field. The fact that we need $W(0,0)$ alone leads to an explicit experiment setting using balanced homodyne detection[16], wherein only a few extra common optical devices and standard intensity difference measurements are necessary. We consider this method based on highly developed detector technologies very favorably for a demonstration of our scheme. Very clear and detailed discussion of the setups and mathematical derivations can be found in [16].

Our calculation gives the measurement result and the variance of phase estimation that quantifies the quantum enhancement explicitly respectively as

$$\langle\hat{\Pi}\rangle_\phi = \sqrt{\frac{2}{n\omega+2}}, \tag{3}$$

$$\Delta\phi^2 = \frac{\langle\hat{\Pi}^2\rangle_\phi - \langle\hat{\Pi}\rangle_\phi^2}{\left(\partial\langle\hat{\Pi}\rangle_\phi/\partial\phi\right)^2} = \frac{\omega(n\omega+2)^2}{2\eta_1^2\eta_2^2 n(n+2)^2\sin^2 2\phi}, \tag{4}$$

where $\omega = 2\eta_1\eta_2(n+2)\cos^2\phi + (\eta_1+\eta_2)(2-\eta_1-\eta_2)$. (3)(4) reduce to the ideal case[7] when $\eta_1 = \eta_2 = 1$: $\langle\hat{\Pi}\rangle_\phi = \frac{1}{\sqrt{1+\bar{n}(\bar{n}+2)\cos^2\phi}}$, $\Delta\phi = \frac{1+n(n+2)\cos^2\phi}{|\sin\phi|\sqrt{n(n+2)}}$. This ideal $\Delta\phi$ is a monotonic function of ϕ if $\phi \in [0, \pi/2]$, i.e. the best precision is achieved in the vicinity of $\phi = \pi/2$. However, we can notice (4)'s explicit dependence on both n and η, i.e. the monotonic property against ϕ no longer exists in the lossy case. Actually, this new relationship $\Delta\phi = \Delta\phi(n, \eta_1, \eta_2, \phi)$ is not simple. 1) It will be strongly affected by the values of n and η, where the average photon number n directly depends on the squeeze parameter ζ of TMSV state and η_1, η_2 is due to the degree of imperfection of the phase shifter or the arms. 2) Instead of exploitation of quantum enhancement at the vicinity of $\phi = \pi/2$, we can find an optimal phase ϕ_o to measure. This optimal phase $\phi_o = \phi_o(n, \eta_1, \eta_2)$, whereupon we attain the minimal $\Delta\phi$, can be straightforwardly calculated by simple derivative from our exact (4). 3) We point out that without this "optimal measurement point" amendment, the direct phase estimation will perform very badly and no sign of enhancement could be observed (so we don't show it in FIG.3(RIGHT). This is indeed a quite unexpected feature in the presence of noise, and no trace can be seen in the ideal case. Since losses are mostly generated by the phase accumulation, we focus on the $\eta_1 = \eta, \eta_2 = 0$ case henceforth. Interestingly, there do exist monotonic dependences on n and η respectively of this ϕ_o, which is shown in FIG.3(LEFT). Thus, we found that the salient and quite notable difference between ideal case and practical lossy case is the varying optimal measurement point, which will obviously affects the real-world experimental strategies for quantum metrology. Physical considerations, e.g. the generality of quantum metrology framework and the mathematical equivalence between quantum metrology in optical system and some other physical systems, imply that the above discussion won't be limited to specific state preparation, phase accumulation or detection scheme and these new features of noisy quantum metrology will appear extensively in many other cases.

Compared with our exact lossy QFI and the classical limit $\frac{1+\sqrt{\eta}}{2\sqrt{n\eta}}$ for coherent state[3], the performance of parity measurement at optimal measurement point with losses in the dispersive arm alone has been calculated, where significant quantum enhancement is achieved in $\eta = 0.99$ case as shown in FIG.3(RIGHT). To our knowledge of contemporary optical technology in laboratories, this is already enough for a proof-of-principle demonstration of our scheme . In addition, our exact lossy QFI bound of phase estimation cannot be totally achieved with parity measurement since QFI provides the tightest bound of mixed state after photon losses within the framework of quantum metrology, i.e. there's still more effort to be devoted for the quantum extraction of phase information. Although being monotonic, our parity measurement precision slowly deviates from the lossy QFI with large average photon number and imperfection, this proves the vulnerability of quantum enhancement against noises.

In practical experiment settings, we have to make biased measurements in order to achieve the best precision. As aforesaid, we firstly calculate the optimal phase ϕ_o from the knowledge of state preparation and experimental imperfection. If the phase ϕ to be measured is small, we then adjust the phase shifter to a biased phase shift $\varphi = \phi_o + \phi$. The parity measurement of φ shares a same precision with ϕ, which can be easily seen from (4). In real need of precise phase measurement, we can always make the phase to be measured small through the knowledge of specific phase accumulation physical processes.

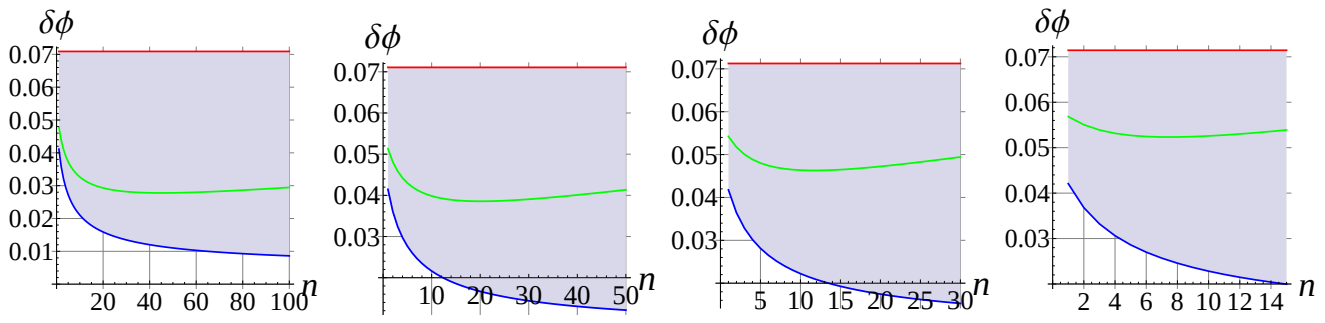

FIG. 4. Repeated-experiment phase error $\delta\phi$ vs average photon number n for one-arm losses ($\eta = 99\%, 98\%, 97\%, 96\%$ from left to right, N=200 fixed). Red horizontal line: Classical limit[3]. Blue line: Quantum limit of exact QFI. Green line: Optimal phase measurement error via parity detection.

As for the situation closer to real experimental setups, we generally perform the experiment of identical setting many times, i.e. we divide our N-photon resource into ν identical quantum states of light with $n = N/\nu$ being interpreted as the average photon number in the above discussion. Therefore the more general formula of measurement error is $\delta\phi(n,\eta,\phi) = \frac{\Delta\phi(n,\eta,\phi)}{\sqrt{N/n}}$. With N fixed, the optimization of phase measurement point is identical to (4). However, there turns out to be an optimal n_o that increases with η to attain minimal error $\delta\phi$ for fixed η and N as shown in FIG.4, i.e. very large photon number is not simply always good, which means there exists a tradeoff between the quantum enhancement surpassing the classical error reduction $1/\sqrt{\nu}$ and the more losses inevitably accompanying the more photons. Therefore noisy scenario requires a new arrangement of total photon resources, since the quantum enhancement in fact has a very different asymptotic performance than the simple $1/\sqrt{\nu}$ or ideal HL $1/n$.

ACKNOWLEDGEMENT

XBW proposed this work. XXZ and YXY contributed equally to this work. The authors thank Zong-Wen Yu for useful discussion and Bo-Sen Lv for technical assistance. This work was supported in part by the National High-Tech Program of China through Grants No. 2011AA010800 and No. 2011AA010803 and by NSFC Grants No. 11174177 and No. 60725416.

---

* xbwang@mail.tsinghua.edu.cn

[1] S.L. Braunstein and C.M. Caves, Phys. Rev. Lett. 72, 3439(1994); S.L. Braunstein, C.M. Caves, and G.J. Milburn, Ann. Phys. (N.Y.) 247, 135(1996).
[2] V. Giovannetti, S. Lloyd, and L. Maccone, Phys. Rev. Lett. 96, 010401(2006).
[3] U. Dorner et al., Phys. Rev. Lett. 102, 040403 (2009); R. Demkowicz-Dobrzanski et al., Phys. Rev. A 80, 013825(2009).
[4] S.F. Huelga et al., Phys. Rev. Lett. 79, 3865(1997).
[5] B.M. Escher, R.L. de Matos Filho, and L. Davidovich, Nature Phys. 7, 406(2011).
[6] A. Datta et al., Phys. Rev. A 83, 063836(2011).

[7] P.M. Anisimov et al., Phys. Rev. Lett. 104, 103602 (2010).

[8] J.J. Bollinger et al., Phys. Rev. A 54, 4649(1996).

[9] C.C. Gerry and J. Mimih, Contemp. Phys. 51, 497(2010).

[10] X.B. Wang, T. Hiroshima, A. Tomita, and M. Hayashi, Phys. Rep. 448, 1(2007).

[11] Gh.-S. Paraoanu and H. Scutaru, Phys. Rev. A 61, 022306(2000).

[12] X.B. Wang, L.C. Kwek, and C.H. Oh, J. Phys. A 33, 4925(2000).

[13] A physically perspicuous upper bound can be obtained using the QFI of the larger system (system considered plus the environment): $\tilde{F}_Q \equiv F_Q^{(S+E)} = \langle\psi_f|\Delta(\hat{a}^\dagger\hat{a})|\psi_f\rangle = \eta^2 n(n+2) + \eta(1-\eta)n$ with $|\psi_f\rangle$ being the TMSV state after photon losses for instance.

[14] X.B. Wang, Ph.D. dissertation, National University of Singapore(2002).

[15] A. Royer, Phys. Rev. A 15, 449(1977).

[16] W.N. Plick et al., New J. Phys. 12, 113025(2010).